




S

SUPACORD

Supacord is a heavy contract fibre bonded floorcovering and can be found in education, universities, libraries, apartment block communal areas, office environments, retail outlets, and public sector buildings.

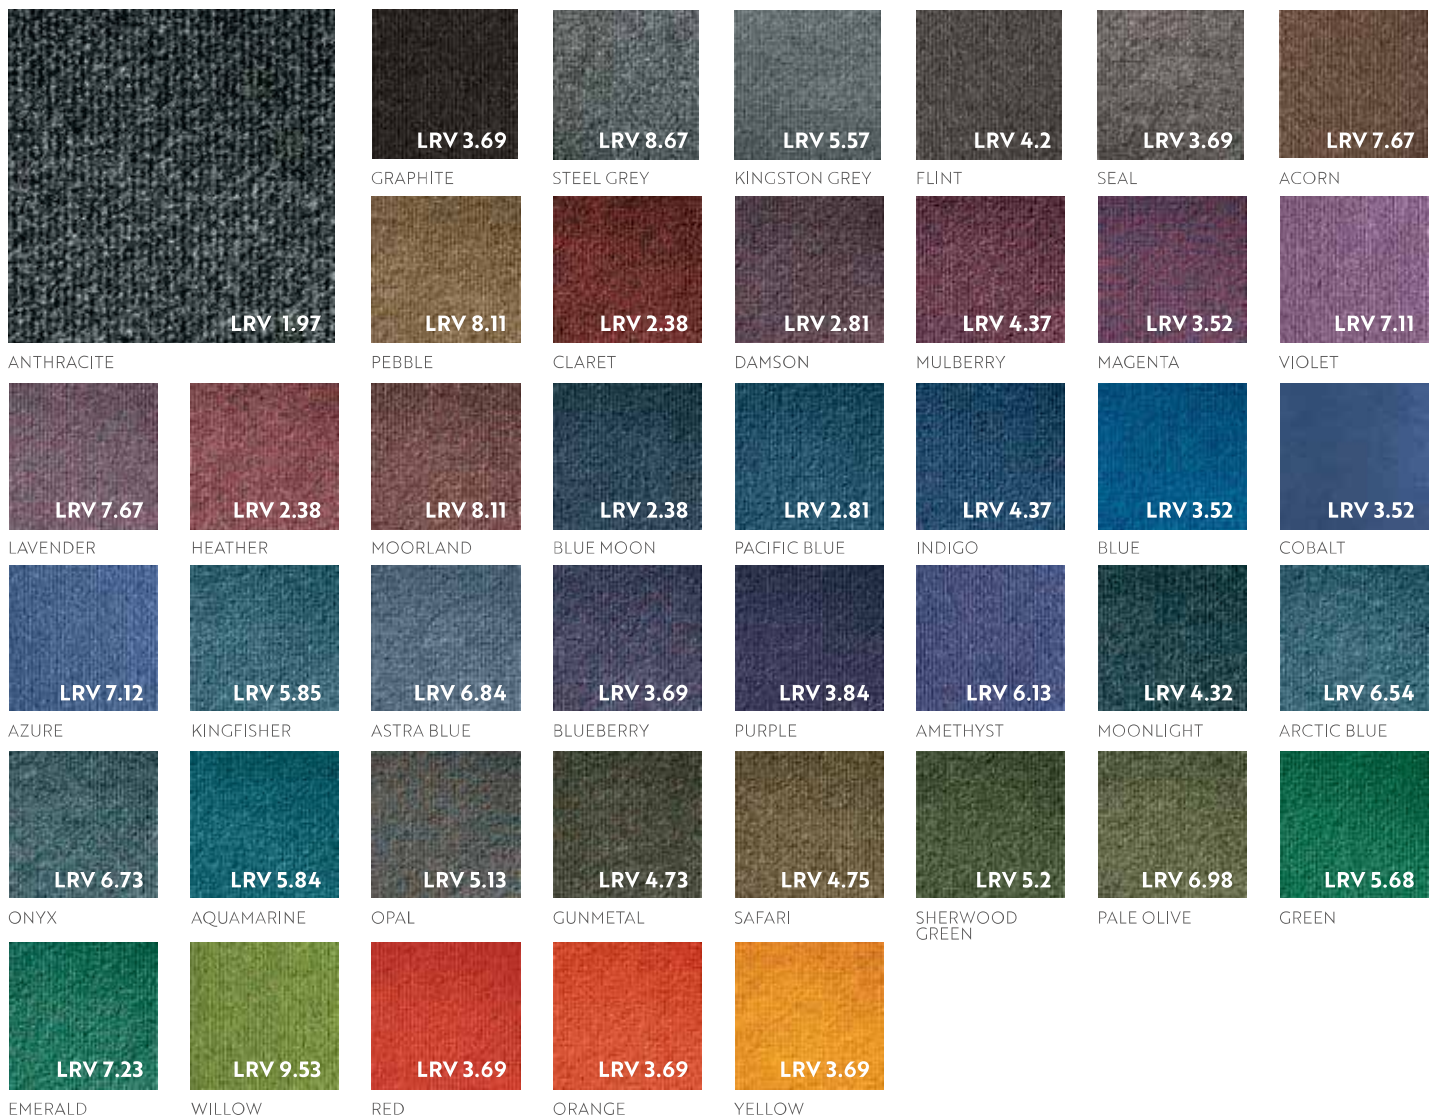

| Specification | Supacord | | | 10 YEAR WEAR WARRANTY |
|------------------------|---|----------------------------|--------------------------------|-----------------------|
| Fibre Construction | 80% Polypropylene, 15% Polyamide, 5% Recycled Polyester | | | |
| Colour Fastness | Light (BS EN ISO 105:B02) 6 Wet Rubbing (BS EN ISO 105:BO1) 4-5 Dry Rubbing (BS EN ISO 105:X12) 4-5 | | | |
| Flammability | BS5287 Assessment and Labelling of Textile Floorcoverings tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char BS EN 13501 Class Cfl-s1 (Sheet) Class Bfl-s1 (Tile) Class Cfl-s1 (Plank) | | | |
| Antistatic | Suitable for use in computer rooms | | | |
| Impact Noise Reduction | BS EN ISO 140-8: 19dB (Sheet and Tile) | | | |
| Formats | Sheet <input checked="" type="radio"/> | Tile <input type="radio"/> | Plank <input type="checkbox"/> | |
| Backing | - | Bitumen | Bitumen | |
| Special Addition | Available in Cushion / Acoustic Back tiles with result for Impact Noise Reduction BS EN ISO 140-8: 22dB | | | |
| Size | 2 metre and 4 metre Ribbing runs down length of roll | 50cm x 50cm | 100cm x 25cm | |
| Weight | 1020gsm | 4020gsm | 4020gsm | |
| Thickness | 6.20mm | 7.60mm | 7.60mm | |



BREEAM® 'A+' Rated



