


# OVER LED





LED INCLUDED

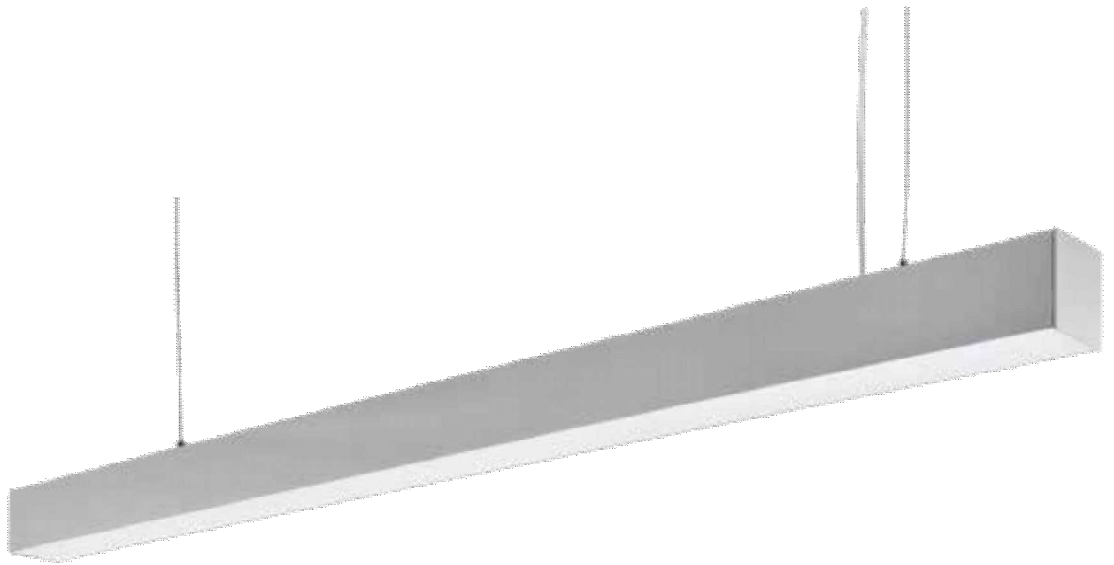

C - COLOR | KOLOR

choose color on p. 23 |  
kolory do wyboru na str. 23


IP44 on request |  
IP44 na zapytanie



options | opcje DALI A  
1-10V

## LED MODULE | MODUŁ LED WARM WHITE | BIAŁY CIEPŁY 3000K



280330.00.OP_C	3300lm   22W   L= 846mm
280440.00.OP_	4400lm   29W   L=1126mm
280550.00.OP_	5500lm   36W   L=1406mm
280660.00.OP_	6600lm   44W   L=1686mm
280770.00.OP_	7700lm   51W   L=1967mm
280880.00.OP_	8800lm   58W   L=2247mm
280990.00.OP_	9900lm   65W   L=2527mm
281100.00.OP_	11000lm   73W   L=2807mm
281210.00.OP_	12100lm   80W   L=3087mm
281320.00.OP_	13200lm   87W   L=3367mm



options | opcje DALI A  
1-10V

## LED MODULE | MODUŁ LED COLD WHITE | BIAŁY ZIMNY 4000K


280331.00.OP_C	3300lm   21W   L= 846mm
280441.00.OP_	4400lm   27W   L=1126mm
280551.00.OP_	5500lm   34W   L=1406mm
280661.00.OP_	6600lm   41W   L=1686mm
280771.00.OP_	7700lm   48W   L=1967mm
280881.00.OP_	8800lm   55W   L=2247mm
280991.00.OP_	9900lm   61W   L=2527mm
281101.00.OP_	11000lm   68W   L=2807mm
281211.00.OP_	12100lm   75W   L=3087mm
281321.00.OP_	13200lm   82W   L=3367mm

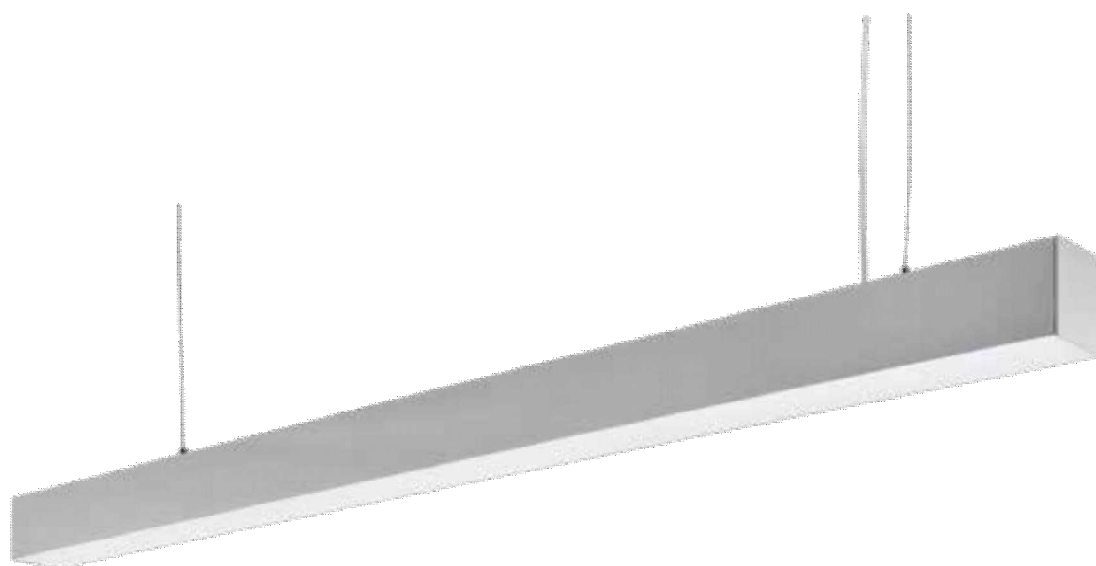

C - COLOR | KOLOR

choose color on p. 23 |  
kolory do wyboru na str. 23

IP44 on request |  
IP44 na zapytanie



options | opcje

**T5 HE | G5**

280114.00.OP. <u>C</u>	1x14W   L= 585mm
280121.00.OP._	1x21W   L= 885mm
280128.00.OP._	1x28W   L=1185mm
280135.00.OP._	1x35W   L=1485mm

**T5 HO | G5**

280124.00.OP._	1x24W   L= 585mm
280139.00.OP._	1x39W   L= 885mm
280154.00.OP._	1x54W   L=1185mm
280149.00.OP._	1x49W   L=1485mm
280180.00.OP._	1x80W   L=1485mm

# OVER LED




## LED INCLUDED

### M - MOUNTING TYPE | RODZAJ MOCOWANIA



10 - surface mounted |  
nastropowa  
12 - wall luminaire lighting  
down | kinkiet świecący w dół  
13 - wall luminaire lighting up |  
kinkiet świecący do góry

### C - COLOR | KOLOR

choose color on p. 23 |  
kolory do wyboru na str. 23

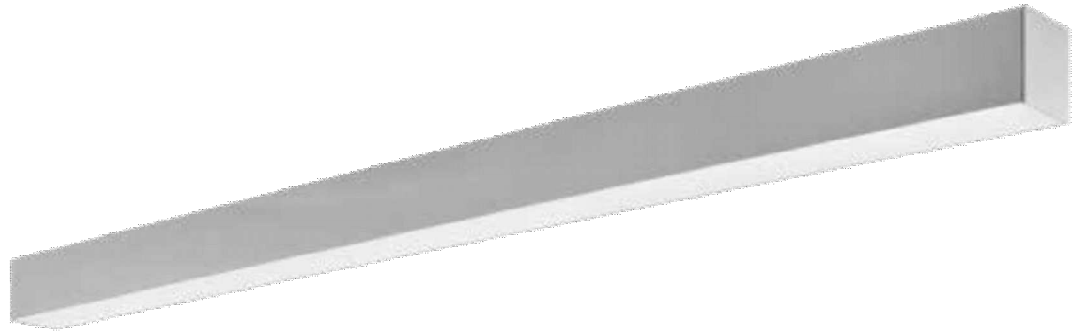

IP44 on request |  
IP44 na zapytanie




options | opcje



### LED MODULE | MODUŁ LED WARM WHITE | BIAŁY CIEPŁY 3000K

280330.M.OP.C	3300lm   22W   L= 846mm
280440._.OP._.	4400lm   29W   L=1126mm
280550._.OP._.	5500lm   36W   L=1406mm
280660._.OP._.	6600lm   44W   L=1686mm
280770._.OP._.	7700lm   51W   L=1967mm
280880._.OP._.	8800lm   58W   L=2247mm
280990._.OP._.	9900lm   65W   L=2527mm
281100._.OP._.	11000lm   73W   L=2807mm
281210._.OP._.	12100lm   80W   L=3087mm
281320._.OP._.	13200lm   87W   L=3367mm



options | opcje



### LED MODULE | MODUŁ LED COLD WHITE | BIAŁY ZIMNY 4000K

280331.M.OP.C	3300lm   21W   L= 846mm
280441._.OP._.	4400lm   27W   L=1126mm
280551._.OP._.	5500lm   34W   L=1406mm
280661._.OP._.	6600lm   41W   L=1686mm
280771._.OP._.	7700lm   48W   L=1967mm
280881._.OP._.	8800lm   55W   L=2247mm
280991._.OP._.	9900lm   61W   L=2527mm
281101._.OP._.	11000lm   68W   L=2807mm
281211._.OP._.	12100lm   75W   L=3087mm
281321._.OP._.	13200lm   82W   L=3367mm





LED INCLUDED




M - MOUNTING TYPE |  
RODZAJ MOCOWANIA

10 - surface mounted |  
nastropowa  
12 - wall luminaire lighting  
down | kinkiēt świecący w dół  
13 - wall luminaire lighting up |  
kinkiēt świecący do góry

C - COLOR | KOLOR

choose color on p. 23 |  
kolory do wyboru na str. 23

IP44 on request |  
IP44 na zapytanie

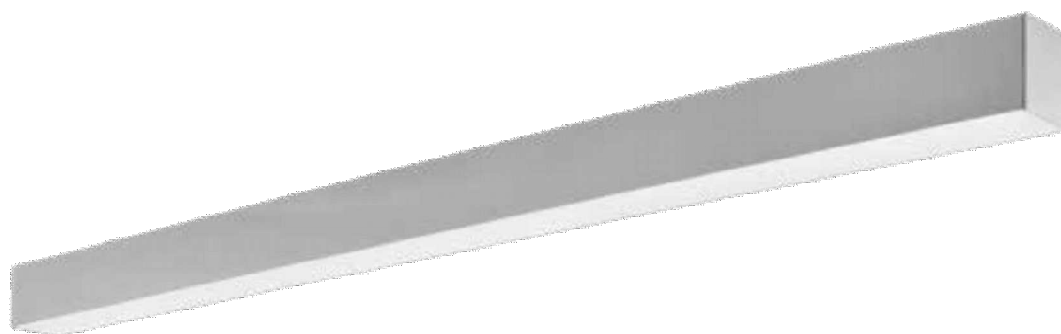


options | opcje DALI A  
1-10V

**T5 HE | G5**


280114. <u>M</u> . <u>OP</u> . <u>C</u>	1x14W   L= 585mm
280121. <u>__</u> . <u>OP</u> . <u>__</u>	1x21W   L= 885mm
280128. <u>__</u> . <u>OP</u> . <u>__</u>	1x28W   L=1185mm
280135. <u>__</u> . <u>OP</u> . <u>__</u>	1x35W   L=1485mm

**T5 HO | G5**

280124. <u>__</u> . <u>OP</u> . <u>__</u>	1x24W   L= 585mm
280139. <u>__</u> . <u>OP</u> . <u>__</u>	1x39W   L= 885mm
280154. <u>__</u> . <u>OP</u> . <u>__</u>	1x54W   L=1185mm
280149. <u>__</u> . <u>OP</u> . <u>__</u>	1x49W   L=1485mm
280180. <u>__</u> . <u>OP</u> . <u>__</u>	1x80W   L=1485mm

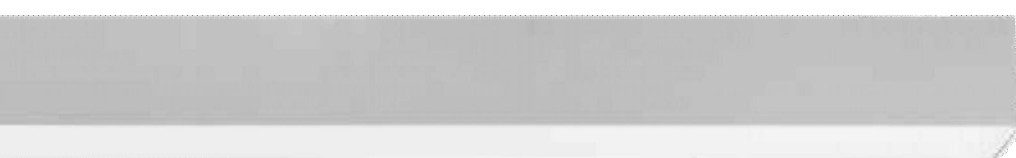




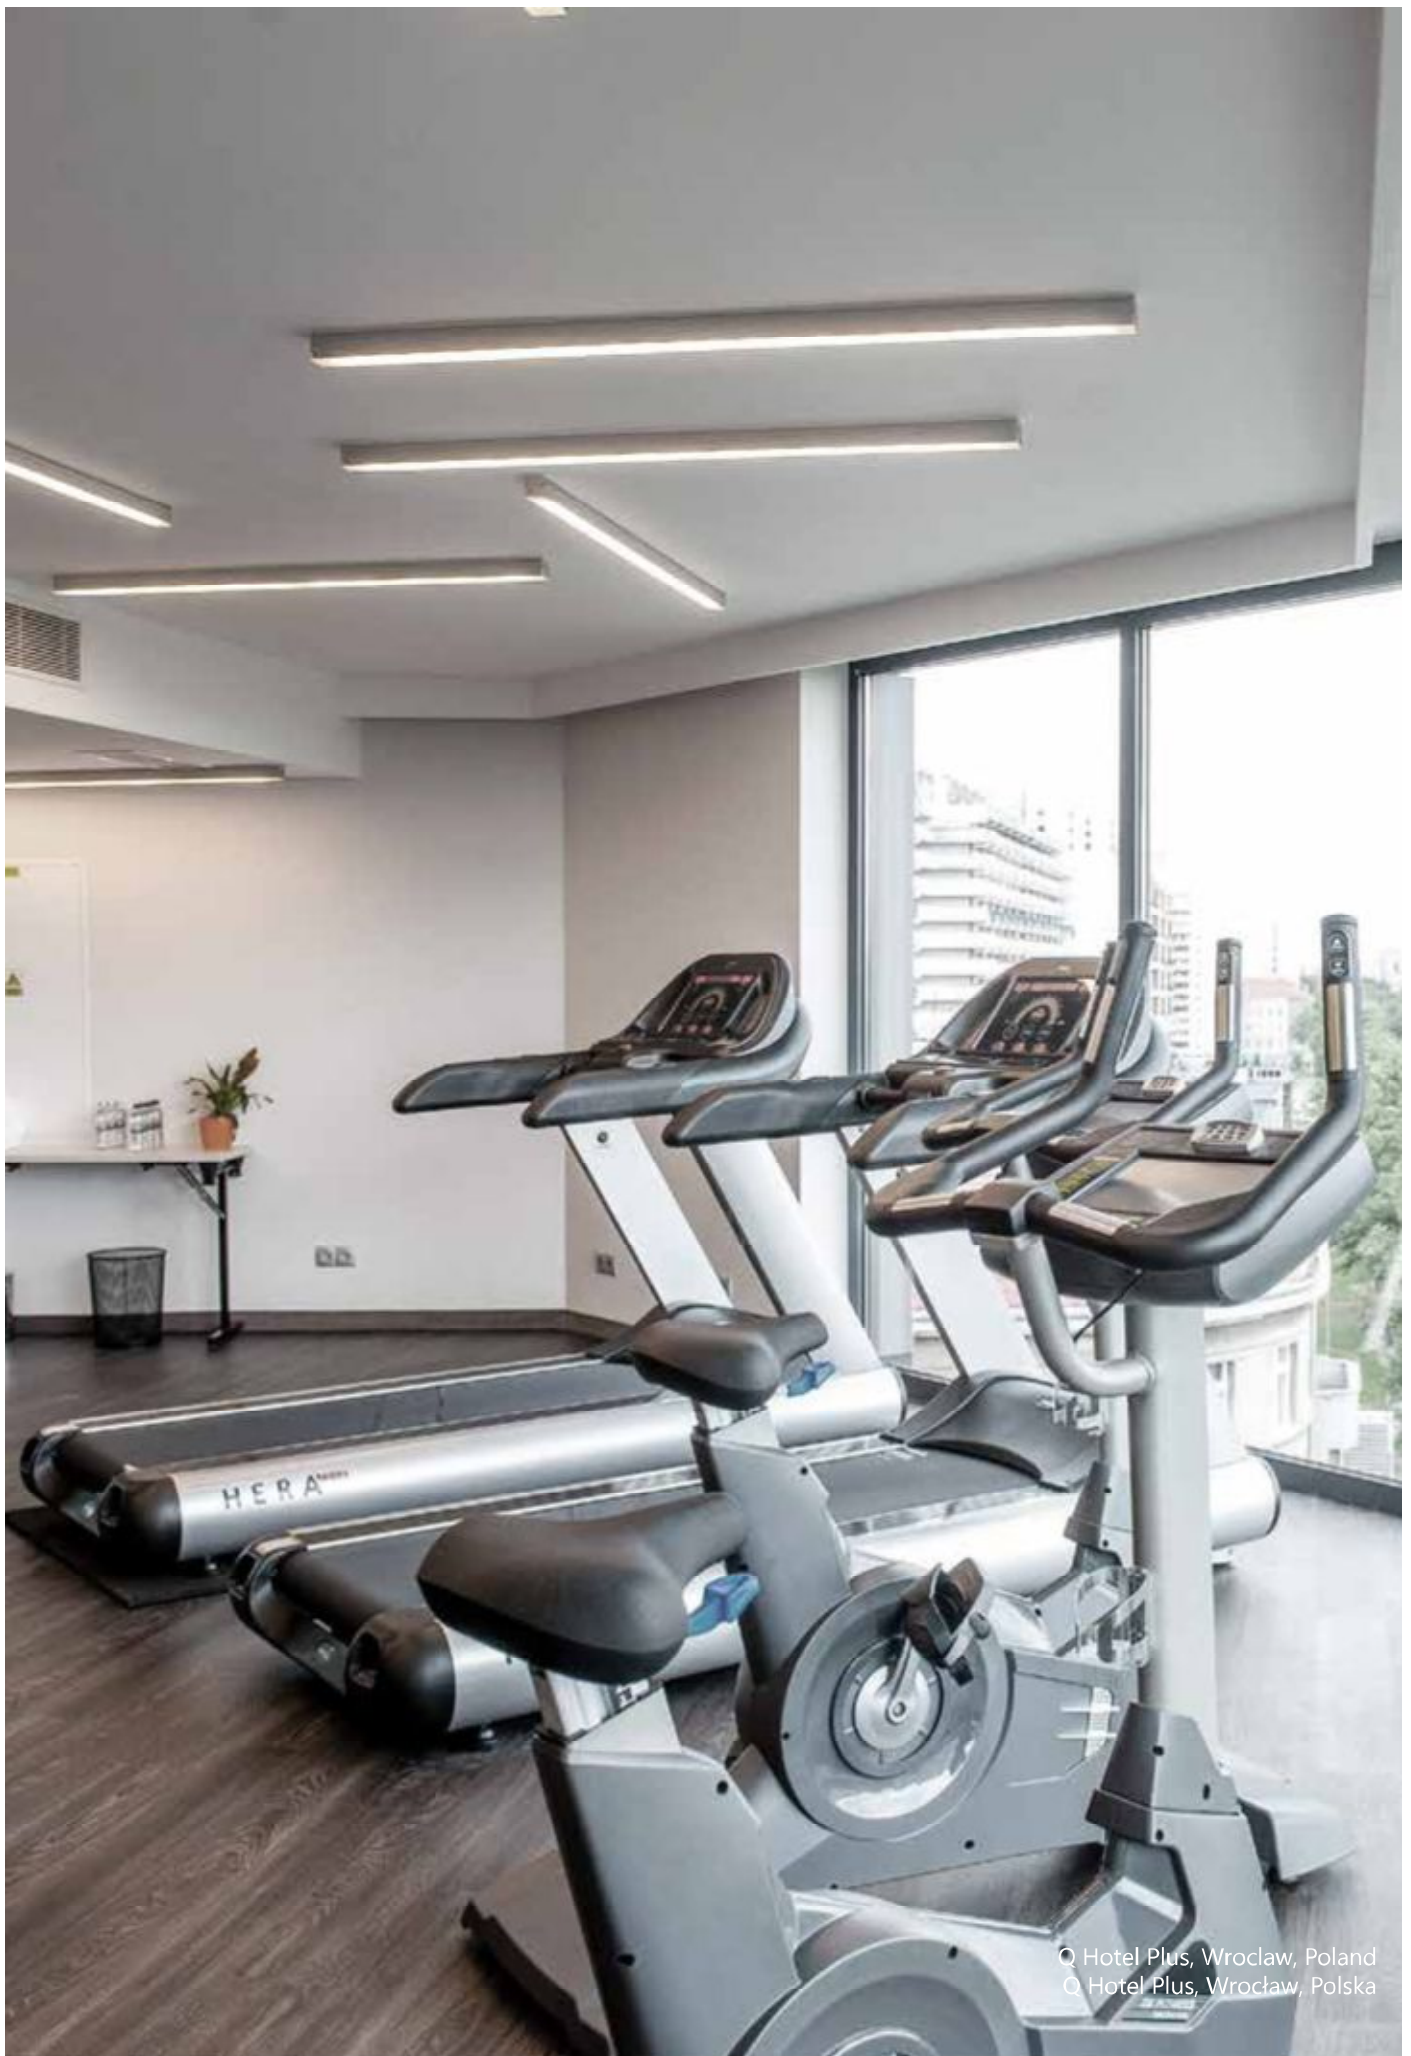

Q Hotel Plus, Wrocław, Poland  
Q Hotel Plus, Wrocław, Polska

# OVER LED





LED INCLUDED



C - COLOR | KOLOR

choose color on p. 23 |  
kolory do wyboru na str. 23


IP44 on request |  
IP44 na zapytanie



options | opcje DALI A  
1-10V

## LED MODULE | MODUŁ LED WARM WHITE | BIAŁY CIEPŁY 3000K



280330.20.OP_C	3300lm   22W   L= 846mm
280440.20.OP_	4400lm   29W   L=1126mm
280550.20.OP_	5500lm   36W   L=1406mm
280660.20.OP_	6600lm   44W   L=1686mm
280770.20.OP_	7700lm   51W   L=1967mm
280880.20.OP_	8800lm   58W   L=2247mm
280990.20.OP_	9900lm   65W   L=2527mm
281100.20.OP_	11000lm   73W   L=2807mm
281210.20.OP_	12100lm   80W   L=3087mm
281320.20.OP_	13200lm   87W   L=3367mm



options | opcje DALI A  
1-10V

## LED MODULE | MODUŁ LED COLD WHITE | BIAŁY ZIMNY 4000K



280331.20.OP_C	3300lm   21W   L= 846mm
280441.20.OP_	4400lm   27W   L=1126mm
280551.20.OP_	5500lm   34W   L=1406mm
280661.20.OP_	6600lm   41W   L=1686mm
280771.20.OP_	7700lm   48W   L=1967mm
280881.20.OP_	8800lm   55W   L=2247mm
280991.20.OP_	9900lm   61W   L=2527mm
281101.20.OP_	11000lm   68W   L=2807mm
281211.20.OP_	12100lm   75W   L=3087mm
281321.20.OP_	13200lm   82W   L=3367mm

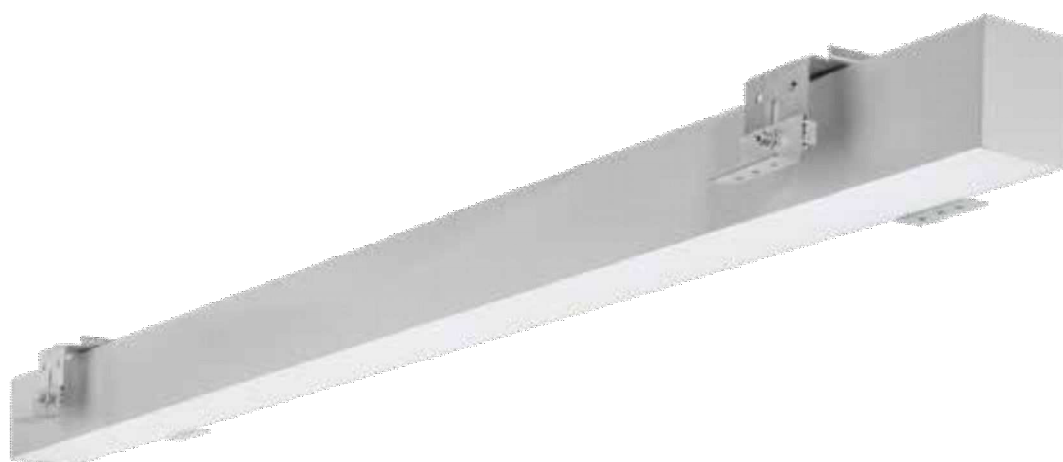

C - COLOR | KOLOR

choose color on p. 23 |  
kolory do wyboru na str. 23

IP44 on request |  
IP44 na zapytanie



options | opcje DALI A  
1-10V

**T5 HE | G5**

280114.20.OP. <u>C</u>	1x14W   L= 585mm
280121.20.OP._	1x21W   L= 885mm
280128.20.OP._	1x28W   L=1185mm
280135.20.OP._	1x35W   L=1485mm

**T5 HO | G5**

280124.20.OP._	1x24W   L= 585mm
280139.20.OP._	1x39W   L= 885mm
280154.20.OP._	1x54W   L=1185mm
280149.20.OP._	1x49W   L=1485mm
280180.20.OP._	1x80W   L=1485mm



# OVER LED




LED INCLUDED




C - COLOR | KOLOR

choose color on p. 23 |  
kolory do wyboru na str. 23

IP44 on request |  
IP44 na zapytanie




length of profile with frame: L+21mm |  
długość profilu z ramką: L+21mm



options | opcje DALI A  
1-10V

## LED MODULE | MODUŁ LED WARM WHITE | BIAŁY CIEPŁY 3000K

280330.21.OP. <u>C</u>	3300lm   22W   L= 846mm
280440.21.OP._	4400lm   29W   L=1126mm
280550.21.OP._	5500lm   36W   L=1406mm
280660.21.OP._	6600lm   44W   L=1686mm
280770.21.OP._	7700lm   51W   L=1967mm
280880.21.OP._	8800lm   58W   L=2247mm
280990.21.OP._	9900lm   65W   L=2527mm
281100.21.OP._	11000lm   73W   L=2807mm
281210.21.OP._	12100lm   80W   L=3087mm
281320.21.OP._	13200lm   87W   L=3367mm




options | opcje DALI A  
1-10V

## LED MODULE | MODUŁ LED COLD WHITE | BIAŁY ZIMNY 4000K


280331.21.OP. <u>C</u>	3300lm   21W   L= 846mm
280441.21.OP._	4400lm   27W   L=1126mm
280551.21.OP._	5500lm   34W   L=1406mm
280661.21.OP._	6600lm   41W   L=1686mm
280771.21.OP._	7700lm   48W   L=1967mm
280881.21.OP._	8800lm   55W   L=2247mm
280991.21.OP._	9900lm   61W   L=2527mm
281101.21.OP._	11000lm   68W   L=2807mm
281211.21.OP._	12100lm   75W   L=3087mm
281321.21.OP._	13200lm   82W   L=3367mm






C - COLOR | KOLOR

choose color on p. 23 |  
kolory do wyboru na str. 23



length of profile with frame: L+21mm |  
długość profilu z ramką: L+21mm

IP44 on request |  
IP44 na zapytanie



options | opcje DALI A  
1-10V

**T5 HE | G5**

280114.21.OP.C  
280121.21.OP.\_\_  
280128.21.OP.\_\_  
280135.21.OP.\_\_

1x14W | L= 585mm  
1x21W | L= 885mm  
1x28W | L=1185mm  
1x35W | L=1485mm

**T5 HO | G5**

280124.21.OP.\_\_  
280139.21.OP.\_\_  
280154.21.OP.\_\_  
280149.21.OP.\_\_  
280180.21.OP.\_\_

1x24W | L= 585mm  
1x39W | L= 885mm  
1x54W | L=1185mm  
1x49W | L=1485mm  
1x80W | L=1485mm

